


# Tree Guying Kit

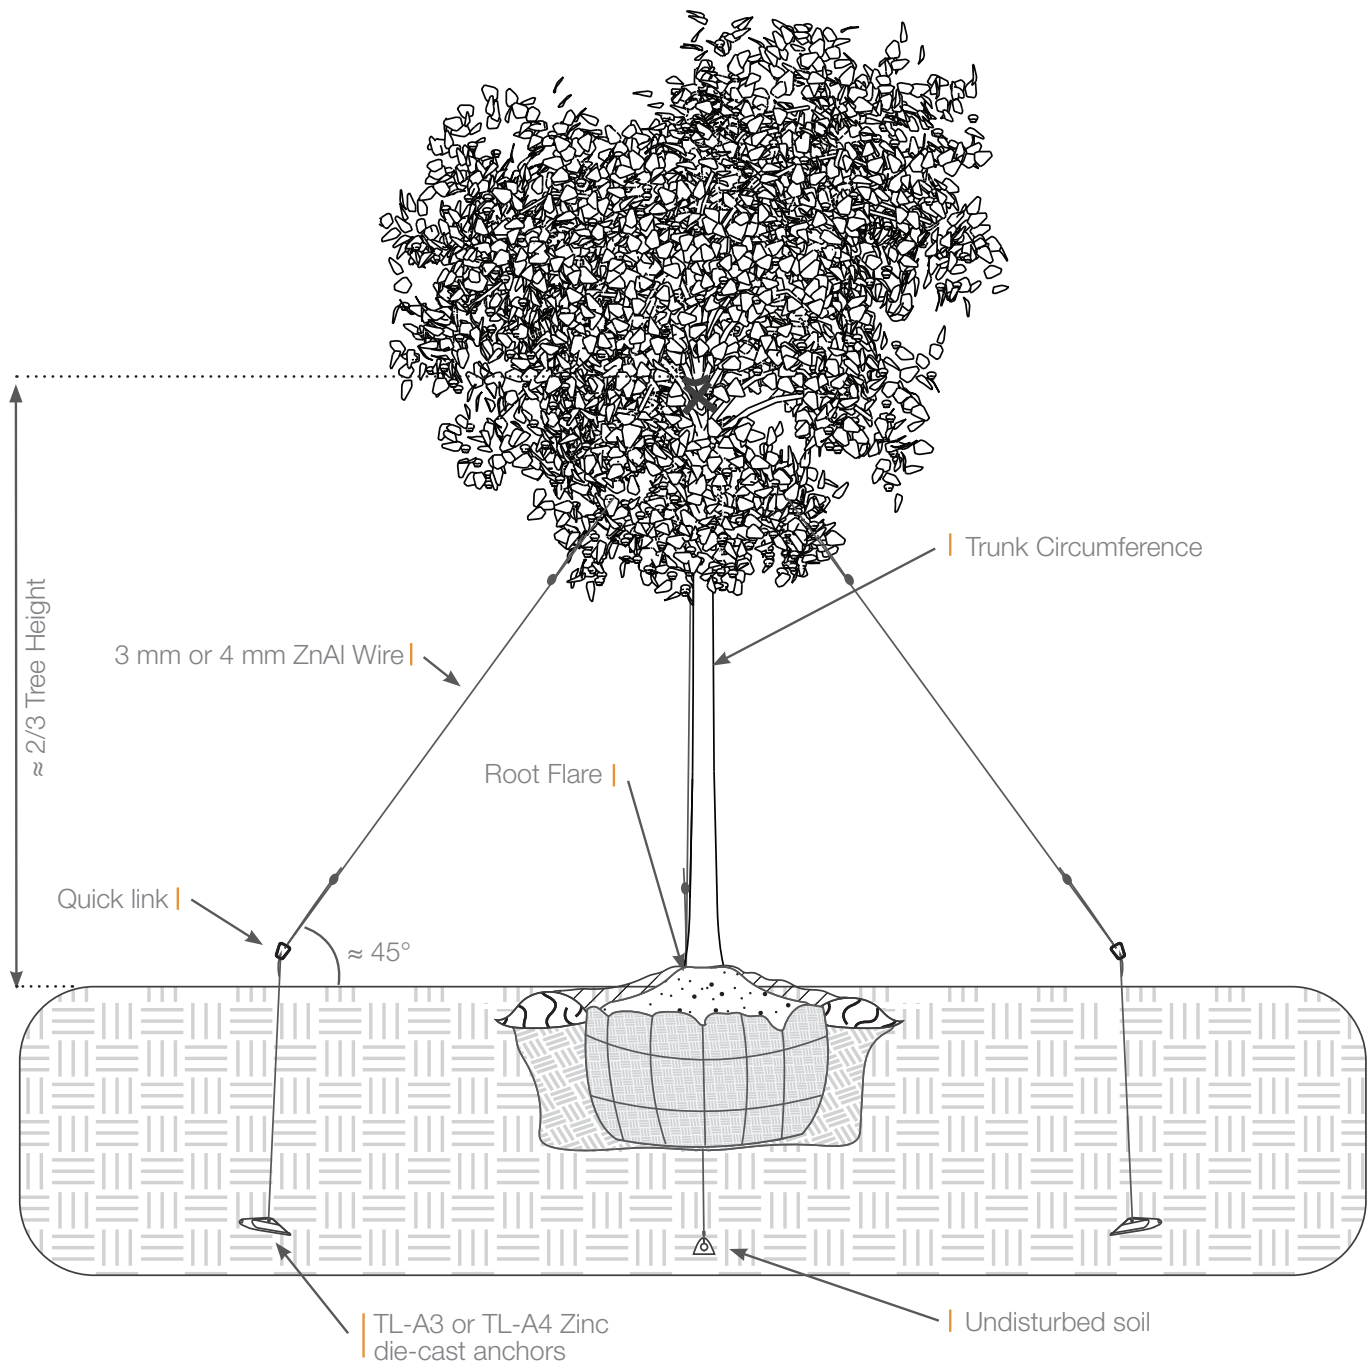

Product	Trunk Circumference	Tree Height	Reccomended Install Tools	Tensioning Method	Contents
TGK3	up to 25 cm	2.5 - 4.5 m	GPD Drive Tool	Griipple Tensioner & Torq Tool	3x TL-A3, 3x Quick Links, 3x 3 mm (1*19) 4.5 m wire rope, Griipple Plus Medium tensioners & 3 protective rubber sleeves
TGK 4	up to 45 cm	4.5 - 7.5 m	GPD Drive Tool	Griipple Tensioner & Torq Tool	3x TL-A4, 3x Quick Links, 3x 4 mm (1*19) 5 m wire rope, Griipple Plus Large tensioners & 3 protective rubber sleeves

# Features & Benefits

- Gripple Plus tensioner allows fast and secure installation
- Ground level tensioning enables easy and accurate tree straightening
- Rubber sleeves eliminate frictional damage to trunk
- Manufactured using corrosion resistant materials for a durable solution
- Terra-Lock Anchor is quick to install with a high load capacity

## Anchor Installation



1 Insert Drive Rod into the Terra-Lock™ Anchor



2 Drive the Anchor until the loop is just above ground level



3 Remove Drive Rod



4 Activate Anchor by pulling the wire upwards

## Sling Installation



1 Thread guy wire through the tensioner



2 Thread guy wire through rubber sleeve sleeve



3 Loop guy wire round trunk at attachment point



4 Create loop by putting tail through Gripple Plus tensioner



5 Thread guy wire through the second tensioner at ground level



6 Loop guy wire through Quick Link



7 Create loop by putting tail through second tensioner



8 Tension at ground level to straighten tree

### TIPS

- Use strong branches to prevent the sling sliding down the trunk
- Guy at 2/3 of the total tree height for maximum stability
- Stabilise tree by installing guy wires at 45°
- To speed up installation use the GPD & JackJaw® installation tools